



US006664454B1

(12) **United States Patent**  
**Johnson**

(10) **Patent No.:** **US 6,664,454 B1**  
(45) **Date of Patent:** **Dec. 16, 2003**

(54) **MUSICAL INSTRUMENT**

**OTHER PUBLICATIONS**

(76) **Inventor:** **Mark A. Johnson**, 2290 E. Fisher La.,  
Salt Lake City, UT (US) 84109

Internet, The Didgeridoo Store.\*

\* cited by examiner

(\*) **Notice:** Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 384 days.

*Primary Examiner*—Kimberly Lockett

(74) *Attorney, Agent, or Firm*—Brian C. Trask

(57) **ABSTRACT**

(21) **Appl. No.:** **09/605,229**

(22) **Filed:** **Jun. 28, 2000**

**Related U.S. Application Data**

(60) Provisional application No. 60/141,640, filed on Jun. 30,  
1999.

(51) **Int. Cl.<sup>7</sup>** ..... **G10D 3/02**

(52) **U.S. Cl.** ..... **84/383 R; 84/377**

(58) **Field of Search** ..... 84/377, 378, 383,  
84/383 A, 383 R


A musical instrument capable of producing the sound spectrum associated with a traditional Australian didgeridoo, but in a more compact and portable form. In certain embodiments, an air column follows a tortuous path between a mouthpiece, having an input orifice between about one to about one-and-one-half inches in diameter, and an exit port. The air column is housed within a body having a length. The ratio of length of the air column to the instrument body length is preferably greater than 1.5 to provide a compact instrument. The instrument may be manufactured tuned to a traditional key-scale note, and may include tone holes to play other fundamental notes. In certain embodiments, a vibrating membrane may be provided in sealed relation over one or more through-holes in the body to produce other sounds of which a traditional didgeridoo is incapable.






(56) **References Cited**






**U.S. PATENT DOCUMENTS**






3,905,268 A \* 9/1975 Gamble ..... 84/383 A








**19 Claims, 4 Drawing Sheets**

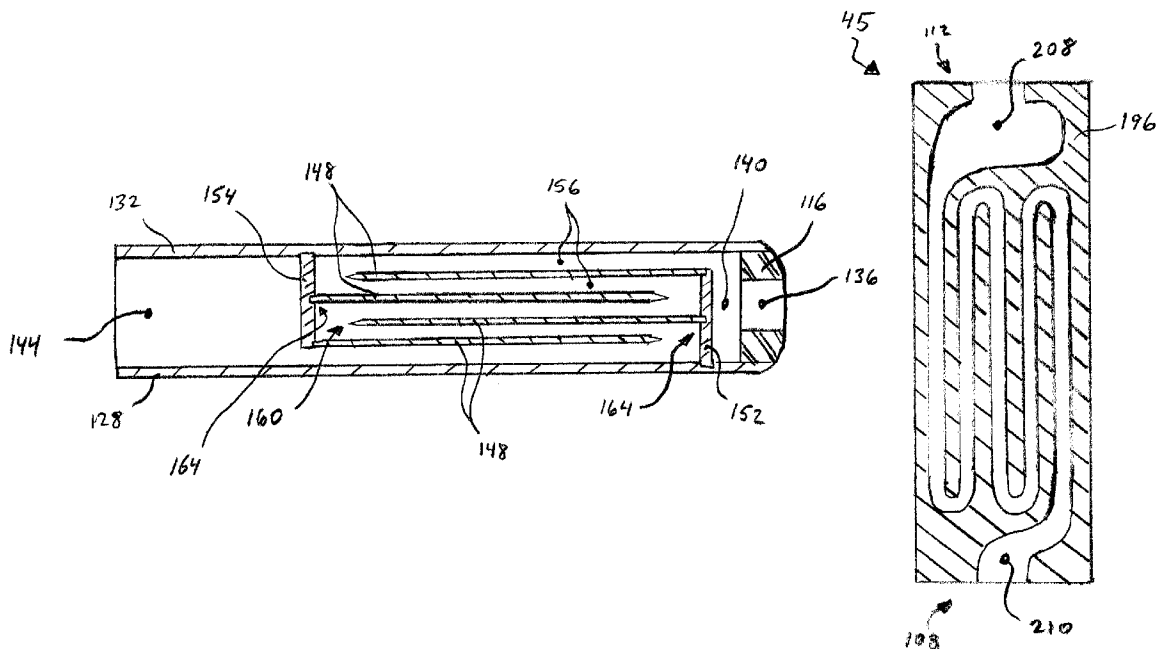

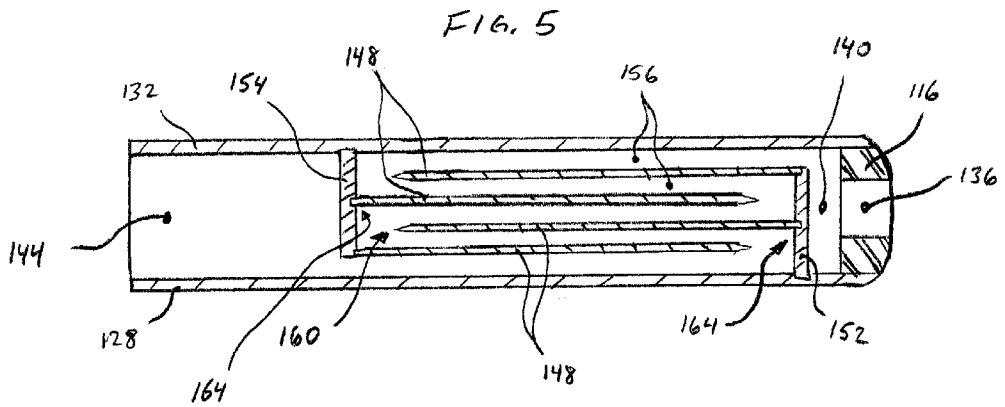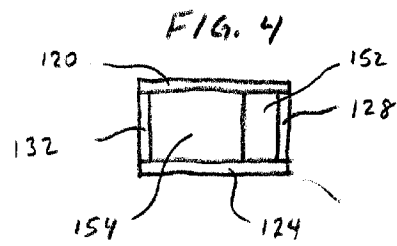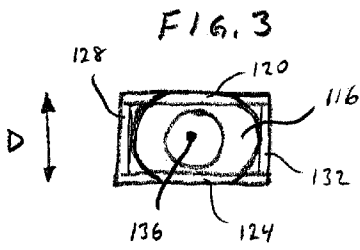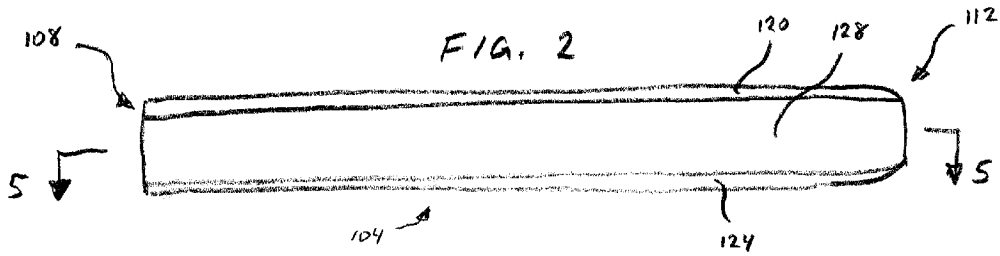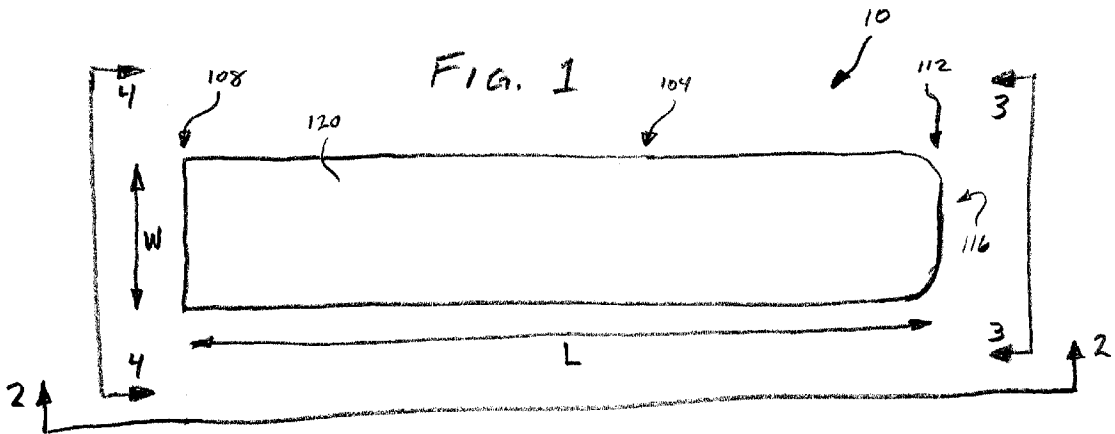

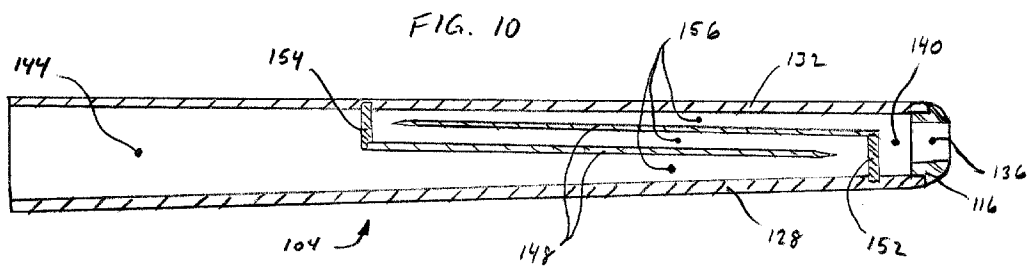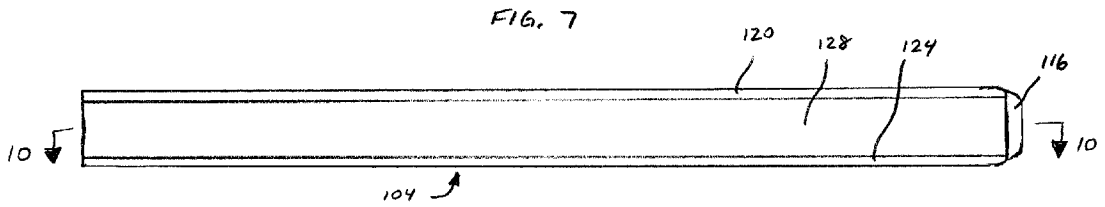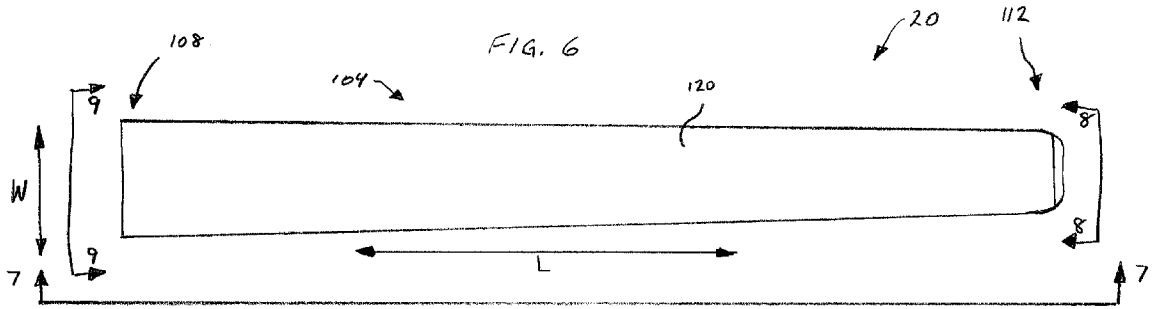

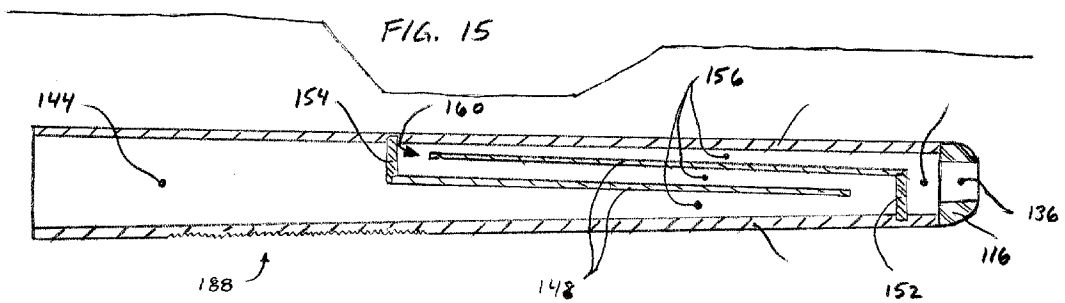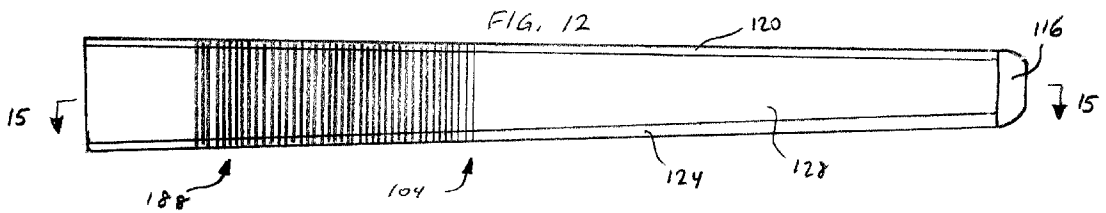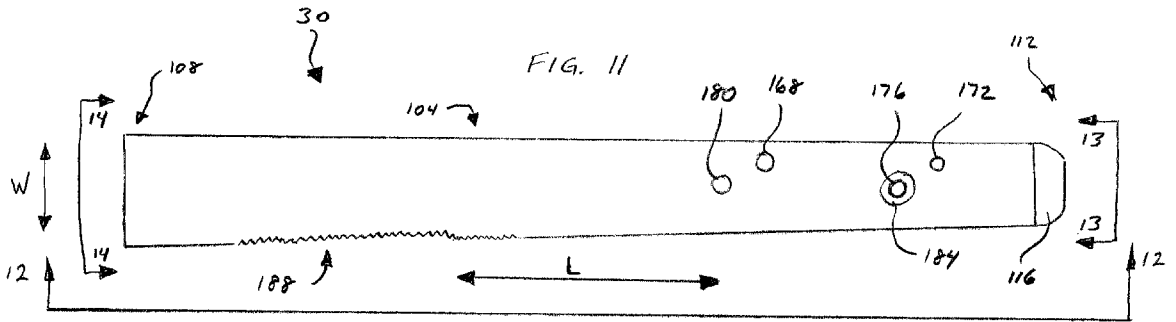

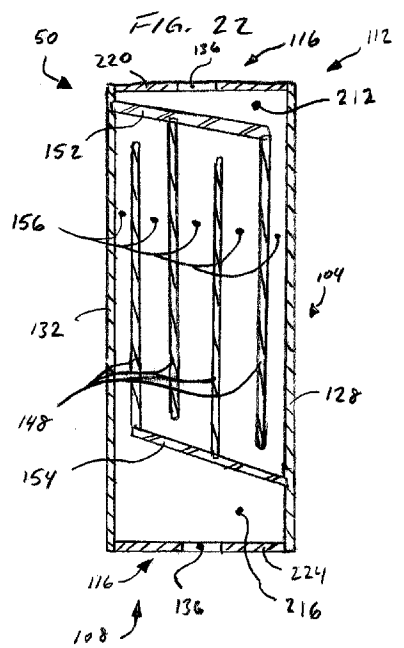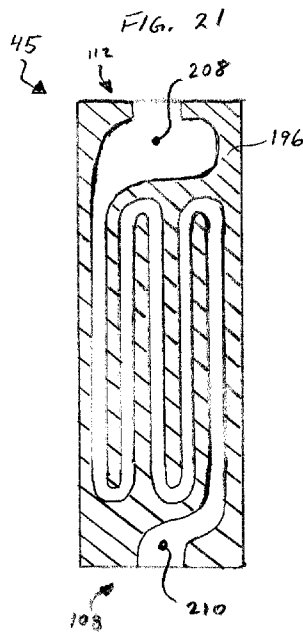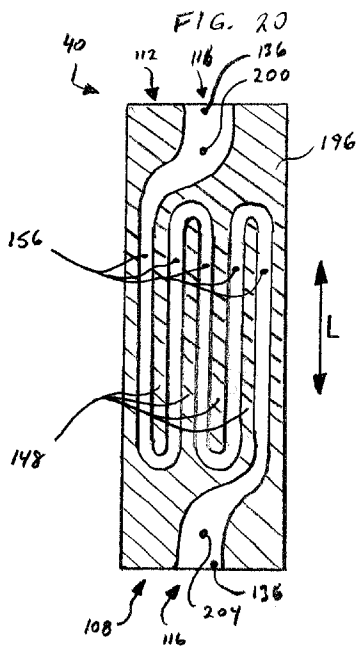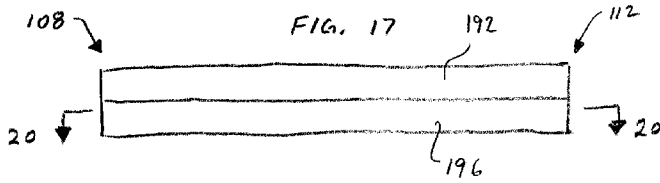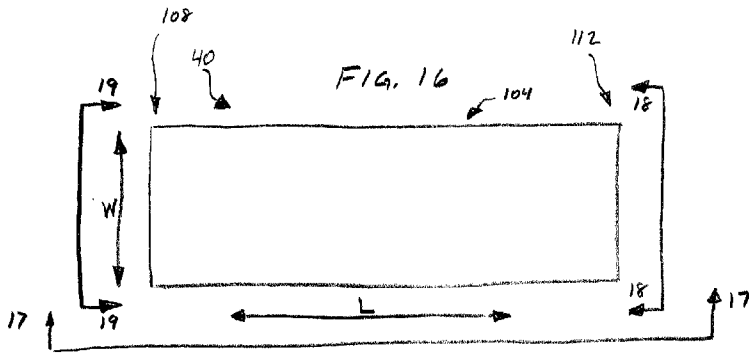

1

**MUSICAL INSTRUMENT****PRIORITY CLAIM**

This application claims the priority of United States provisional patent application serial No. 60/141,640, filed Jun. 30, 1999, for "MUSICAL INSTRUMENT".

**FIELD**

This invention pertains to musical instruments. It is particularly directed to end blown wind instruments patterned after the Didjeridoo of the Australian Bushman. It provides an end blown, compact, Didjeridoo-type wind instrument of increased versatility.

**BACKGROUND**

The Didjeridoo musical instrument has been in use by the Australian Bushman for more than 40,000 years. It consists of a relatively long hollow tube, typically at least four feet in length. In its original form, it was fashioned from a eucalyptus tree branch which had been hollowed out by termites. The internal chamber was characteristically irregular in shape and dimension, with a nominal diameter of up to several inches. The narrowest end of the hollow tube has customarily been modified to interface comfortably with a human mouth. This modification has typically involved applying a workable substance, such as beeswax, to a terminus of the tube, and modeling it into a mouthpiece. A conventional such mouthpiece comprises an approximately axial opening about one to one-and-a-half inches in diameter. In operation, a percussive drone output sound is produced by placing the mouth against the mouthpiece, and blowing through relaxed lips to produce a soft sputtering input sound (as opposed to the buzzing input associated with the playing of brass instruments.)

In recent years, Didjeridoo instruments have been produced in various countries of the world from a variety of materials, including native woods, plastics, fabrics, leathers and clays, among others. Each instrument produces unique characteristic sounds because of their respective unique specific shapes, densities, surface textures and other physical properties. Instruments of various lengths produce drones of various pitch, but a tube length of several feet is essential to produce drone fundamental and overtone pitches. There has evolved an enthusiasm for Didjeridoo playing at both the amateur and professional levels for a variety of reasons. Transport of the instruments is difficult because of their size and sometimes fragile nature. Because of the straight configuration of the vibrating air column, it has not been practical to utilize tone holes to vary the pitch of the instrument. Holes located within reach of the instrumentalist are at the input end of the column, and therefore produce very elevated pitches. Such elevated tones have limited utility.

Another ancient instrument, produced in the 16th century, the "Rackett," incorporated a tortuous passageway within a canister. Sound was produced by blowing through a double reed, fashioned much as a modern bassoon reed. The internal air passage was much longer than the canister length, thereby producing a tone of lower pitch than could otherwise be obtained from an instrument of comparable size. Pitch changes were effected by an elaborate pattern of fingering holes in communication with the air passage. By contrast, only minor pitch changes are possible with traditional Didjeridoos, and any such changes are effected through changes in lip tension.

2

**SUMMARY OF THE INVENTION**

A Didjeridoo-type instrument is simulated by means of a tortuous path chamber pattern constructed within a shell or housing which forms a body. The manner of playing the instrument to produce a fundamental drone sound is substantially identical to that of a traditional Didjeridoo. Moreover, the techniques which have been developed to produce interesting sonic textures, patterns, overtones and similar effects of a traditional instrument are equally applicable and effective when applied to the invention. For example, circular breathing techniques are fundamental to proper operation of both categories of instrument. The invention offers several striking advantages; including compact, easily transportable configurations and increased versatility of sound production. A notable characteristic of certain instruments constructed in accordance with this invention is the ability to produce drone sounds at both fundamental and overtone pitch levels. It is also feasible to locate tone holes within reach of the instrumentalist, thereby making it feasible to modify the effective length of the vibrating air column at its exit port and play additional fundamental notes from one instrument.

The present invention provides a musical instrument capable of reproducing the sound spectrum typically associated with an Australian Didjeridoo. Such instruments are constructed and arranged to provide a tortuous path air chamber with a first mouth piece at a first end configured to permit an instrumentalist to blow through the mouthpiece in a loose-lipped fashion, whereby to create a Didjeridoo-type drone. The tortuous path through the instrument body is constructed to have a minimum total length longer than the length of the instrument body. A suitable air column may be formed by a plurality of baffle walls and baffle blocks arranged to form a plurality of air column segments. The segments may be characterized as "folded" linear sections, or serpentine segments. In certain preferred embodiments, the tortuous path has a total length at least one-and-a-half times as long as the length of the instrument to provide a compact instrument. The mouthpiece typically has a passageway opening, in communication with the air chamber, sized between about one to about one-and-one-half inches in diameter. Certain exemplary instruments have a body with one or more tone holes positioned to establish or change the fundamental note of the instrument when opened or closed. Other instruments may have one or more through-holes in fluid communication with the air column and sealingly covered by a membrane, such that the membrane may function to produce an audible sound while playing the instrument. A friction surface operable to create a percussive sound when stroked with a stylus may also be provided at one or more locations on a body. Some instruments may have a second mouthpiece at a second end, whereby to permit playing the instrument from either of the ends. One advantage of such an arrangement is that the fundamental note may have a different pitch when played from each respective end. The sound producing features disclosed herein may be incorporated in any combination to form an instrument capable of producing the desired instrumental sound.

These features, advantages, and alternative aspects of the present invention will be apparent to those skilled in the art from a consideration of the following detailed description taken in combination with the accompanying drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

In the drawings, which illustrate what is currently regarded as the best mode for carrying out the invention:

FIG. 1 illustrates a front view of a first embodiment of the invention;

FIG. 2 illustrates a side view, looking in the direction of the arrows 2—2, of the embodiment of FIG. 1;

FIG. 3 illustrates an end view, looking in the direction of the arrows 3—3, of the embodiment of FIG. 1;

FIG. 4 illustrates an end view, looking in the direction of the arrows 4—4, of the embodiment of FIG. 1;

FIG. 5 illustrates a section view of the embodiment of FIG. 2, taken along section 5—5 and looking in the direction of the arrows;

FIG. 6 illustrates a front view of a second embodiment of the invention;

FIG. 7 illustrates a side view, looking in the direction of the arrows 7—7, of the embodiment of FIG. 6;

FIG. 8 illustrates an end view, looking in the direction of the arrows 8—8, of the embodiment of FIG. 6;

FIG. 9 illustrates an end view, looking in the direction of the arrows 9—9, of the embodiment of Figure;

FIG. 10 illustrates a section view of the embodiment of FIG. 7, taken along section 10—10 and looking in the direction of the arrows;

FIG. 11 illustrates a front view of a third embodiment of the invention;

FIG. 12 illustrates a side view, looking in the direction of the arrows 12—12, of the embodiment of FIG. 11;

FIG. 13 illustrates an end view, looking in the direction of the arrows 13—13, of the embodiment of FIG. 11;

FIG. 14 illustrates an end view, looking in the direction of the arrows 14—14, of the embodiment of FIG. 11;

FIG. 15 illustrates a section view of the embodiment of FIG. 12, taken along section 15—15 and looking in the direction of the arrows;

FIG. 16 illustrates a front view of a fourth embodiment of the invention;

FIG. 17 illustrates a side view, looking in the direction of the arrows 17—17 of the embodiment of FIG. 16;

FIG. 18 illustrates an end view, looking in the direction of the arrows 18—18, of the embodiment of FIG. 16;

FIG. 19 illustrates an end view, looking in the direction of the arrows 19—19, of the embodiment of FIG. 16;

FIG. 20 illustrates a section view of the embodiment of FIG. 17, taken along section 20—20 and looking in the direction of the arrows;

FIG. 21 illustrates a section view of a fifth embodiment of the invention, having an alternative internal construction;

FIG. 22 illustrates a section view of a sixth embodiment of the invention, having an alternative internal construction.

#### DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

Reference will now be made to the drawings in which the various elements of the invention will be given numerical designations and in which the invention will be discussed so as to enable one skilled in the art to make and use the invention. It is to be understood that the following description is only exemplary of the principles of the present invention, and should not be viewed as narrowing the claims which follow.

These musical instruments are sold by Mark A. Johnson, Salt Lake City, Utah, under the trademark "DIDJBOX", and are constructed in several models. The invention will be made reference to throughout the remainder of this disclo-

sure as an instrument. An instrument according to the invention can be made from any convenient material, including woods, plastics, glass, clay, fabrics, papers, metals or any other material capable of being worked, modeled or formed into a construction providing a tortuous path for a vibrating air column. The materials of composition have an effect upon the overtone qualities of the resulting instrument.

For purposes of this disclosure, a minimum path length of an air column may be defined as the sum of the lengths of the minimum number of straight line segments which can be drawn through a cross-section of the air column from end-to-end. The present invention provides an air column having a minimum length greater than the length of the instrument. A compactness factor may be defined as the ratio of minimum air column length to the instrument length. It is currently thought that a compactness factor of approximately one-and-a-half is about the minimum such factor desirable in the present invention. An increase in the compactness factor generally results in an increasingly portable instrument.

FIGS. 1—5 illustrate a first embodiment of the invention, indicated generally at 10. The instrument 10 has a body 104 spacing apart a bottom end 108 and a top end 112. A mouthpiece 116 may be located on the top end 112 of this embodiment 10. It is within contemplation also alternatively to locate a mouthpiece 116 at other locations along body 104. However, it is generally preferred to locate mouthpiece 116 near or on an end.

In all of the FIGS. 1—22, width, depth and length directions are similarly defined, and indicated by arrows designated W, D, and L respectively, to form a Cartesian coordinate reference system. As illustrated in FIGS. 1—5, body 104 of instrument 10 may be formed from front sheet 120, rear sheet 124, right side panel 128, and left side panel 132. Such construction forms a simple hollow box having open opposite ends. Exemplary instrument 10 has a substantially constant width and depth along its length. Top end 112 may be rounded, as illustrated, to form a pleasing appearance. The external shape of an instrument is not limited to the relatively simple prismatic example embodiments illustrated herein. A representative instrument 10 may be constructed having overall length, width, and depth dimensions of 16 inches, 3 $\frac{3}{8}$  inches, and 2 inches, respectively.

A mouthpiece 116 typically is positioned at top end 112. However, it is further within contemplation for a mouthpiece 116 to be positioned at both ends 108 and 112. A mouthpiece 116 typically has an axial opening 136 with an orifice sized to accommodate the lips of an instrumentalist, and through which such instrumentalist may blow in loose-lipped fashion to provide a loose-lipped sputtering input sound. Opening 136 may be circular in cross section, and in such case, is generally between one to one-and-a-half inches in diameter. Circular or ovoid cross-sectional shapes are preferred in an axial opening 136 through mouthpiece 116, although other shapes are also workable. A musician must simply be able to generate a loose-lipped, or sputtering type, input sound through the mouthpiece 116.

A representation of the internal arrangement of elements forming instrument 10 are best illustrated in FIGS. 4 and 5. A tortuous air path is formed between primary chamber 140 and resonator chamber 144 by way of a plurality of baffle walls 148. Baffle walls 148 are arranged in combination with top and bottom baffle blocks 152 and 154 to form a plurality of air conduit segments 156. The air conduit segments 156 are essentially oriented in a "folded" configuration to pro-

vide a long air resonating column in a compact instrument. Such an air resonating column may be as long as several, or even many, times as long as the instrument.

In an instrument, the length of the vibrating air column determines the base, root, or fundamental note. Additional length in an air column generally creates a lower tone. The axial spacing between baffle blocks **152** and **154** and the length and number of baffles **148** determine the length of the air column. The volume and acoustical quality of the principal root tone, and many primary overtones, are effected by the shape of the resonating chamber **144**. A wide open chamber, without any end restrictions, is generally louder and more "clear" in sound. Instruments having double ended configurations tend to have a sound that may be characterized as slightly muffled in nature, although still pleasing.

Five air conduit segments **156** are illustrated in embodiment of FIG. **5**, although as few as three may be present in a typical instrument. The maximum number of conduit segments **156** is determined, in part, by the width of body **104**. Sound quality is observed to diminish with excessive narrowing or compacting of the air conduits **156**. The minimum size conduit may be determined by personal preference in resulting sound output. A cross-section of a conduit **156** may vary in area along the length of a conduit **156**, and between individual conduits **156**. Changes in cross-section along the length of conduit segments **156** have an effect on the sound, particularly the overtones, produced from the instrument. It is currently preferred to have the final conduit **156**, which opens into resonator chamber **144**, arranged to have a continual increase in cross-section along the length of that conduit segment **156** toward end **108**. Such an arrangement has been determined to produce a louder, more pleasing, sound.

Free ends **160** of baffle walls **148** may have a pointed cross-section, as illustrated in FIG. **5**, to promote smooth air flow. Other cross-sectional configurations are also workable for free ends **160**, including without limitation: rectangular, triangular, ovoid, ogive, or other geometric shapes. Smooth air flow is not required in an instrument, as the instrument emulates Didgeridoos formed by termites and therefore having irregular bores. Fixed ends, indicated generally at **164**, of baffle walls **148** are attached to baffle blocks **152** and **154**. Baffle walls **148** are attached along their lengths to front and rear sheets **120** and **124** to form substantially air tight air conduits **156**. When forming an instrument of materials workable using woodworking methods, elements including body **104** and baffle structure **148**, **152** and **154**, may be assembled using joint methodology known to woodworkers. Typical joint structure may include one or more of: butt, lap, dado, and rabbit joints.

FIGS. **6**–**10** illustrate a second embodiment of an instrument, indicated generally at **20**. Instrument **20** contains structural elements similar to instrument **10**. These elements are designated with corresponding numerals. The primary difference between instruments **10** and **20** is that instrument **20** has a tapered body **104** having a width at bottom end **108** that is greater than a width at end **112**. It has been found that the tapered body provides an acoustical enhancement, projects the sound, and increases volume.

A representative instrument **20** may be constructed having a length of about 24 inches, a substantially uniform depth of about 2 inches, and a width varying linearly between about 2 to about 3 inches. Significantly different dimensions, to construct both larger and smaller instruments, may also be used. It is also within contemplation to incorporate a non-uniform taper along the length of the body **104**. The sub-

stantially uniform depth of a body **104** of instrument **20** creates joints formed by right side **128**, left side **132**, baffle blocks **152** and **154**, and baffle walls **148** with front and rear sheets **120** and **124** that are all located in parallel planes. Such construction reliably produces substantially air-tight internal air channels **156** with relatively simple manufacturing of side and internal elements.

FIGS. **11**–**15** illustrate a third embodiment of instrument, indicated generally at **30**. Instrument **30** also contains structural elements similar to instrument **10**. Again these elements are designated with corresponding numerals. The primary difference between instruments **30** and **20** is that instrument **30** has a tapered body **104** having both a width and a depth at bottom end **108** that is greater than a width and depth at end **112**. The illustrated instrument **30** is representative of a true obelisk, having a four-sided tapered columnar shape. A representative instrument **30** may be constructed having a length of about 24 inches, and both width and depth varying linearly between about 2 to about 3 inches. Significantly different dimensions, to construct both larger and smaller instruments, may also be used. It is also within contemplation to incorporate an increased amount of taper, or even a nonuniform taper, along the length of the body **104**.

The nonuniform depth of the body **104** of instrument **30** creates joints formed by right side **128**, left side **132**, baffle blocks **152** and **154**, and baffle walls **148** with front and rear sheets **120** and **124** that are all located in nonparallel planes. Such construction requires a tight tolerance on depth dimensions of the internal baffle elements to ensure a proper air seal. For example, a baffle wall **148** not aligned parallel to a center axis of body **104** and having a butt joint with front and rear sheets **120** and **124**, must form a seal with surfaces that tapers in two directions simultaneously. Such a seal requires a compound angle at the joint, and involves considerably more manufacturing effort. It has been determined that tapering a body in only one direction, width or depth, is sufficiently effective to produce a most desirably enhanced tone in an instrument.

Instrument **30** illustrates additional elements or features that can be incorporated in a musical instrument according to the present invention. With reference to FIG. **11**, tone holes **168**, **172**, **176**, and **180** may be positioned to correspond to notes D, E, F, and G, in the case where the instrument **30** is tuned to C Major. By covering the holes with his fingers or with plugs, and uncovering one or more while operating the instrument, the musician may create the desired fundamental note in a didgeridoo style. Of course the didgeridoo style has characteristic overtones and other distinctive sound qualities.

Alternatively, or in addition, one or more membrane element(s) **184** may be affixed to body **104** to sealingly cover one or more holes, having various shapes, through body **104**. The vibrating membrane element **184** may be formed from any material capable of transverse membrane oscillation and producing a sound output. Operable materials include masking tape, cellophane, foils, waxed paper and the like. In operation, the musician may place his fingers on the membrane(s) until such time as an additional sound effect is desired while operating the instrument. Following removal of a finger, the membrane can freely oscillate, and add its sound to the instrument **30**'s base sound scheme. The resulting sound effect has been compared to a children's toy instrument commonly called a Kazoo.

FIGS. **11**, **12**, and **15** illustrate optional friction element **188** incorporated into a side of body **104** of instrument **30**.



Friction element **188** may be stroked with a stylus to produce a percussive sound effect. Friction elements **188** may be placed on multiple sides of a body **104**, each such element **188** being constructed to produce an individual percussive sound. Exemplary friction elements **188** may be formed by a series of notches or various shaped irregularities embedded into the body **104**. A musician may rotate the instrument **30** to select the desired friction element **188** in strokable orientation to his stylus of choice. The friction element **188** may be stroked to add a rhythm element to the Didjeridoo-style output of instrument **30**, thereby adding to the one-man-band potential this invention offers.

FIG. **15** illustrates additional alternative construction details of an instrument. Free end **160** of baffle walls **148** are illustrated as blunt, or squared-off. Mouthpiece **116** is assembled to body **104** with a butt joint, compared to the lap joint in FIG. **5**, or the plug fit illustrated in FIG. **10**.

FIGS. **16–20** illustrate a fourth embodiment of instrument, indicated generally at **40**. Instrument **40** also contains structural elements similar to instrument **10**, but manufactured with alternative methods. These similar elements are designated with corresponding numerals. The primary difference between instruments **10** and **40** is that while instrument **10** is assembled from panel elements, instrument **40** may essentially be hollowed out from a single, solid, block. A representative instrument **40** may be constructed having a length of about 12 inches, a substantially uniform depth of about 1¾ inches, and a substantially uniform width of about 4⅝ inches. Significantly different dimensions, to construct both larger and smaller instruments, may also be used. It is also within contemplation to incorporate a taper, including a nonuniform taper, in width and/or in depth, along the length of the body **104**.

Instrument **40**, illustrated in FIGS. **16–20**, is formed from two substantially mirror imaged left and right halves **192** and **196** respectively, glued together at the midplane of resulting body **104**. Such construction reliably produces substantially air-tight internal air channels **156** with relatively simple manufacturing of side and internal elements. A body **104** may alternatively be constructed by forming air conduits **156** in one side member only, then sealing with a front sheet, similar to a front sheet **120**. A body **104** may also be formed from any object which can be hollowed out to form air conduits **156** in a pattern to form a substantially sealed, tortuous path, air chamber. For instance, it is within contemplation to form an instrument **40** interior to a sculpture. The instant invention may therefore be embodied as a musically playable statue. One representative such statue may present an external form in the shape of a whale or dolphin. Such an external shape has significance in the ongoing attempt to communicate with such mammals, and in which effort traditional didgeridoos have found some application.

Instrument **40** is an example of a two ended instrument. Instrument **40** may be played from either end **108** or **112**. Illustrated top chamber **200**, in FIG. **20**, is a simple tubular extension of axial opening **136** in top end **112**. Bottom chamber **204** has a shape similar in construction to chamber **200**. A mouthpiece **116** is formed directly from each of bottom and top ends **108** and **112**. Playing the instrument **40** from top end **112** may sound different than playing it from the bottom end **108**. Differences in tone will depend primarily upon differences in the length, volume, and shape of chambers **200** and **204**. To a lesser extent, tonal differences are effected by cross-section and length changes encountered in traversing air conduits **156** in opposite directions.

With reference to FIG. **21**, a fifth embodiment of an instrument **45** also is a two ended instrument, similar in

construction to instrument **40**. However, instrument **45** has an upper chamber **208** that is much larger than upper chamber **200**. Furthermore, lower chamber **210** has a shorter length than chamber **204**. Comparing the instruments **40** and **45**, one would expect a lower, somewhat muffled, tone when instrument **45** is played from bottom end **108**, and a higher pitch tone when played from top end **112**.

A sixth, and compact, embodiment of instrument **50** is illustrated in FIG. **22**. Instrument **50** is shown in cross-section, and is constructed from panel elements similar in technique to embodiments **10**, **20**, and **30**. Top and bottom chambers **2112** and **216** may have different volumes, as illustrated, to create different pitch tones when played from opposite ends. A mouthpiece **116** is formed on top end **112** by passage **136** through top end panel **220**. A second mouthpiece **116** is formed by passage **136** in bottom end **108** through bottom end panel **224**. Again, the mouthpiece(s) **116** may be formed through any panel of body **104**, although it is currently preferred to locate such mouthpieces at one or more of ends **108** and **112**.

The illustrated embodiments may be regarded as single layer instruments. That is, conduit segments **156** are illustrated as substantially aligned in a single plane to form a layer. Individual conduit segments are “folded” within a planar slab, forming a layer. It is within contemplation to form an instrument according to the principles of this invention having two or more such layers, thereby forming an air column being wrapped, or “folded”, into a 3-dimensional configuration. When constructed using a multilayer scheme, one layer merely communicates to the next layer, prior to exiting a resonant chamber **144**. Furthermore, air conduits **156** need not be substantially linear segments, as illustrated. It is within contemplation to form air conduit segments **156** as arc segments, or even as a continuous spiral or other serpentine path. Such a spiral may form an instrument with a body **104** having a pancake shape. Such a pancake body **104** may be oriented perpendicular to the axis of a mouthpiece **116** or passageway **136**. Alternatively, an axis through a passageway **136** may be oriented at other angles, including parallel, to a plane containing an air conduit segment **156**. An instrument with spiral air conduit segments may have a body **104** conveniently fashioned as a pancake, cylinder (stacked pancakes), ball, or other ovoid shape. Either or both a mouthpiece **116** and a resonant chamber **144** may be part of such a body, or may be regarded as add-on components. Such components may have entry or exit openings located in a plane oriented independent of any axis of the instrument.

All of the embodiments illustrated and described may produce drone sounds in the approximate register and tonality of a traditional Didgeridoo. Unlike its traditional precursor, however, the invention is capable of producing scale tones, both by adjusting lip tension and by the use of tone holes. It is within contemplation to produce instruments in accordance with the invention in various sizes, shapes and pitches. Instruments may be constructed according to the present invention having cross-section shapes that are square, rectangular, oval or round, as well as other prismatic or geometric shapes. Such instruments may further be tapered in a width and/or a depth direction along the length of the instrument. In a cylindrical, round, or ovoid instrument, such taper may be characterized by a change in radius along the length of the instrument. The length of the vibrating air column productive of the fundamental pitch tone, or drone, may range from several inches to tens of feet.

The present invention may be embodied in other specific forms without departing from its spirit or essential charac-

teristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. A musical instrument constructed and arranged to provide a tortuous path air chamber with a first mouth piece at a first end configured to permit an instrumentalist to blow through said mouthpiece in a loose-lipped fashion, whereby to create a drone emulating a didgeridoo, wherein:

said air column is formed by a plurality of baffle walls and baffle blocks arranged to form a plurality of air column segments.

2. The instrument of claim 1, further comprising:

a body containing said tortuous path air chamber, said body having a tone hole positioned to change the fundamental note of said instrument when opened or closed.

3. The instrument of claim 1, further comprising:

a body containing said tortuous path air chamber, said body having an aperture in fluid communication with said air column and sealingly covered by a membrane, said membrane being operable to produce an audible sound during operation of said instrument.

4. The instrument of claim 1, further comprising:

a body containing said tortuous path air chamber, said body having a friction surface operable to create a percussive sound when stroked with a stylus.

5. The instrument of claim 1, further comprising: a second mouthpiece at a second end, whereby to permit playing said instrument from either of said ends.

6. The instrument of claim 5, wherein:

said instrument is constructed and arranged such that the fundamental note has a different pitch when played from each respective said end.

7. A musical instrument constructed and arranged to provide a tortuous path air chamber with a first mouth piece at a first end configured to permit an instrumentalist to blow through said mouthpiece in a loose-lipped fashion, whereby to create a drone emulating a didgeridoo, wherein:

said air column comprises a serpentine air column segment.

8. The instrument of claim 7, further comprising:

a body containing said tortuous path air chamber, said body having a tone hole positioned to change the fundamental note of said instrument when opened or closed.

9. The instrument of claim 7, further comprising:

a body containing said tortuous path air chamber, said body having an aperture in fluid communication with

said air column and sealingly covered by a membrane, said membrane being operable to produce an audible sound during operation of said instrument.

10. The instrument of claim 7, further comprising:

a body containing said tortuous path air chamber, said body having a friction surface operable to create a percussive sound when stroked with a stylus.

11. The instrument of claim 7, further comprising:

a second mouthpiece at a second end, whereby to permit playing said instrument from either of said ends.

12. The instrument of claim 11, wherein:

said instrument is constructed and arranged such that the fundamental note has a different pitch when played from each respective said end.

13. An apparatus having a body with a first length, the apparatus comprising:

a tortuous path air column having a second length, said air column having a mouthpiece at a first end and a resonating chamber at a second end; said mouthpiece comprising an interface having an orifice shaped and dimensioned to accommodate the lips of an instrumentalist such that a loose-lipped input sound may be generated; and said second length being at least one-and-one-half times as long as said first length, wherein: said air column comprises a plurality of air column segments arranged in fluid communication.

14. The apparatus of claim 13, wherein said segments are defined by a plurality of baffle walls and baffle blocks.

15. The apparatus of claim 13, wherein said segments comprise a serpentine segment.

16. The apparatus of claim 13, wherein said body comprises a tone hole operable to control the fundamental note of said instrument.

17. The apparatus of claim 13, said body comprising a through-hole in fluid communication with said air column and sealingly covered by a membrane, said membrane being operable to produce an audible sound during operation of said instrument.

18. The apparatus of claim 13, said body having a friction surface operable to create a percussive sound when stroked with a stylus.

19. A musical instrument with a body having a first length, said body being formed substantially as a hollow box, said box having an internal baffle arrangement defining an air column following a tortuous path having a second length between a mouthpiece and a sound exit port, said first and second lengths producing a compactness factor greater than about one and-one-half, and said mouthpiece providing an input orifice shaped and dimensioned to accommodate the lips of an instrumentalist such that a loose-lipped input sound may be generated.

\* \* \* \* \*